


SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)

Nominal Capacity (At 1mA/20°C/68°F/2.0V Cut-Off)	1.2 A h
Open Circuit Voltage (At 20°C/68°F)	3.67 V
Nominal Voltage (At 1mA/20°C/68°F)	3.6 V
Maximum Continuous Current	50 mA
Maximum Pulse Current Capability	100 mA
Rated 1 Sec. Pulse Capability (To 3V)	20 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	9.2 g (0.324 oz)
Anode Surface Area	6 cm ²
Volume	4.3 cm ³
Diameter (Max)	14.5 mm
Height (Max)	25.2 mm


DIMENSIONS IN MM

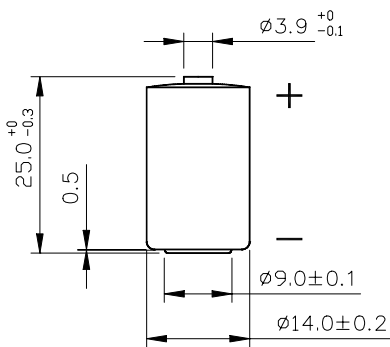


WARNING

Fire, Explosion And Severe Burn Hazard.
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F (100°C), Incinerate
Or Expose Contents To Water

DISCHARGE CHARACTERISTICS AT +20°C

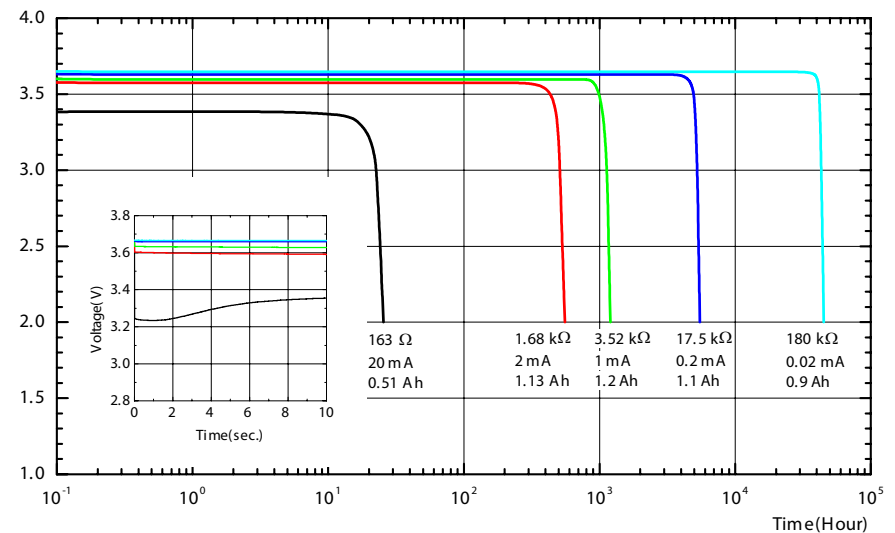

CAPACITY vs. CURRENT

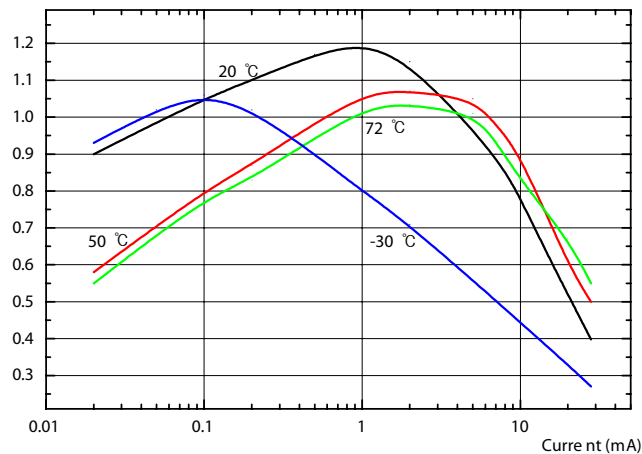

OPERATING VOLTAGE

